

EarthDay



EarthDay

EarthDay acts as a tribute to the everyday natural wonders that surround us. Each color pays homage to the environment that inspires it, and the glossy surface offers a dynamic finish that evokes natural movement as you exist around it. Experience the harmony of nature with EarthDay, and invite the outside in.

Contents


Colors / Sizes / Mosaics	pg. 2
Visualizations	pg. 4
Specifications	pg. 14
Accreditations	pg. 16



COLORS / SIZES




GLACIER 3"x12" - 1104966

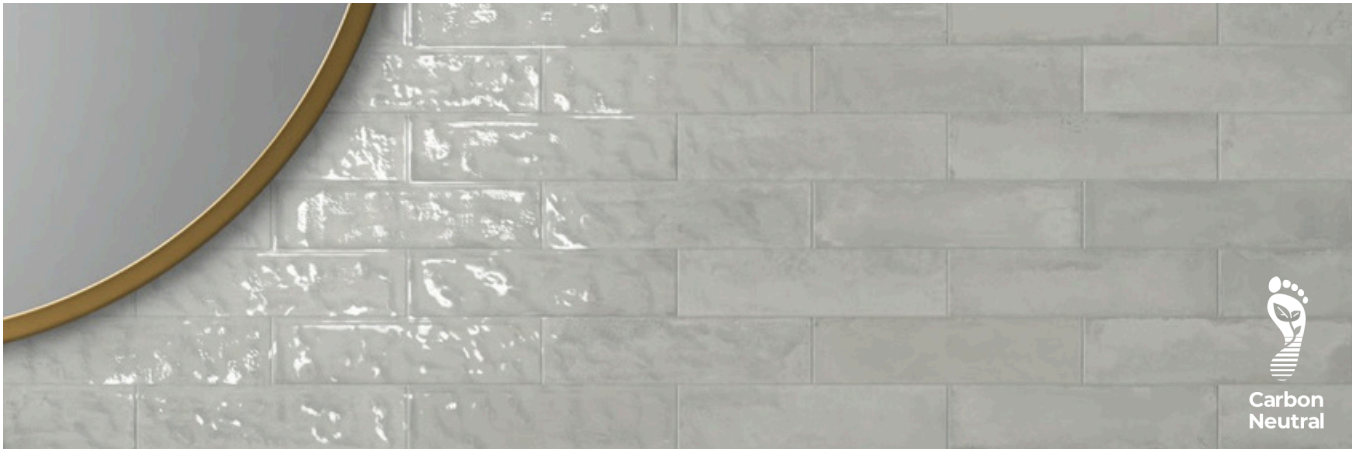


MOON 3"x12" - 1104971




DESERT 3"x12" - 1104970

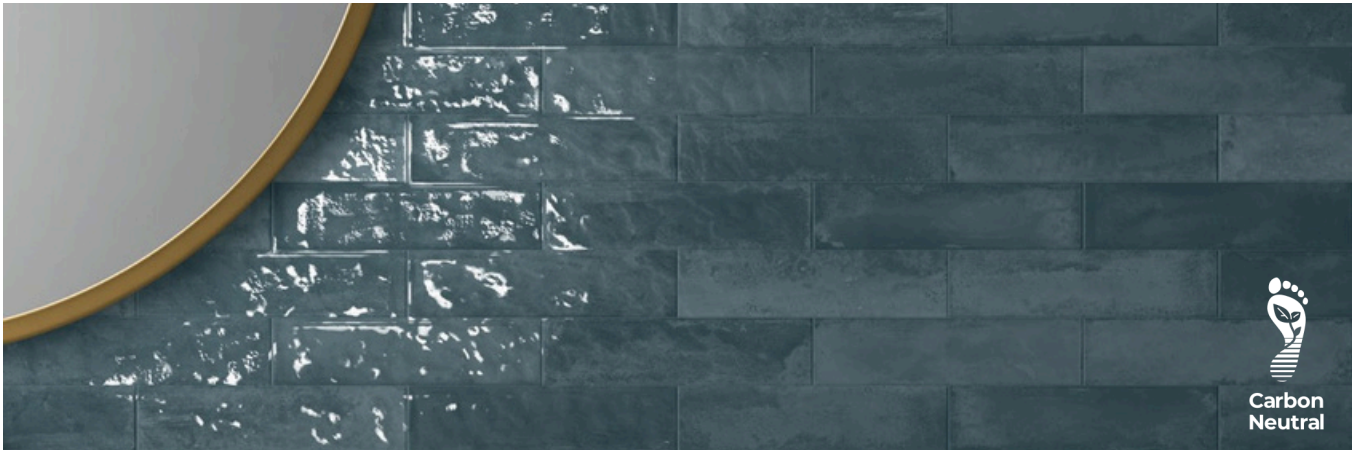

SKY 3"x12" - 1104967

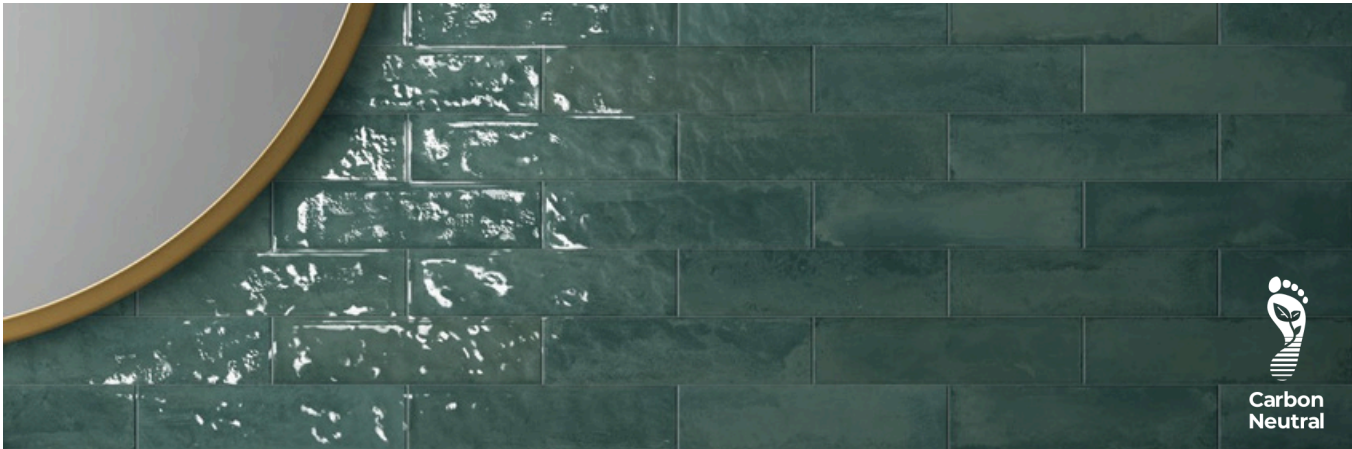

FOREST 3"x12" - 1104969

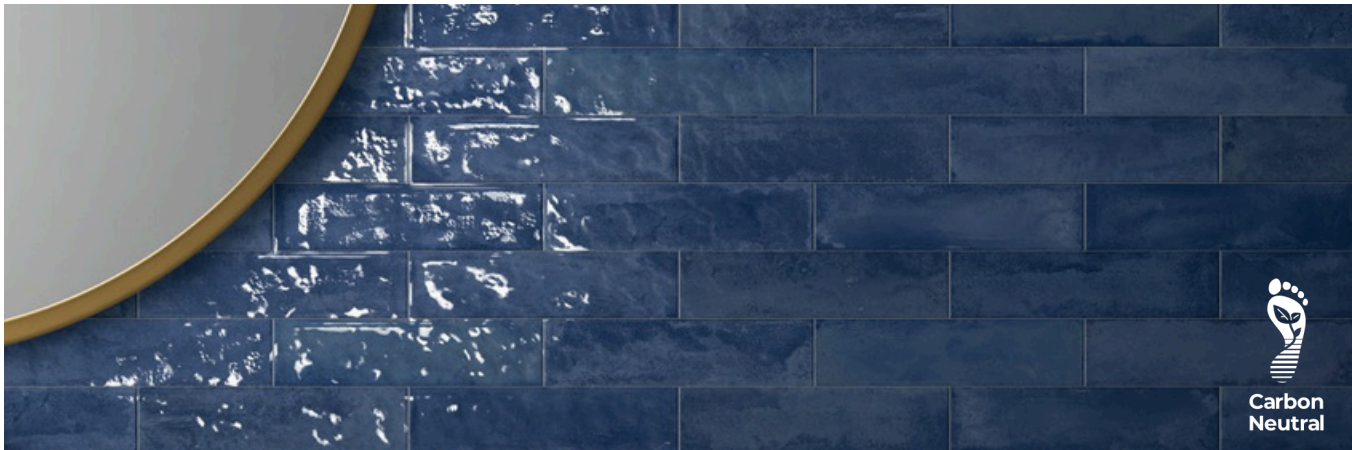

OCEAN 3"x12" - 1104968

Colors shown may vary from actual product.
Final selection should be made from actual product samples.



Porcelain tile
has the lowest
embodied carbon
of any competing
flooring product.







Wall: EarthDay_Desert_3"x12" _Glossy
 Floor: EcoRock_Cross-Cut_Fog_24"x48" _Matte



Over 95% of the raw materials used in the production of these tiles are sourced within a 500 mile radius of the factory.



Wall: EarthDay_Sky_3"x12" _Glossy
 Floor: Woodsey_Chestnut_8"x48" _Matte





As a part of our pledge to become carbon neutral,
EarthDay serves as a vital step in the process of
creating a more sustainable world.
It's time to take responsibility.


















Colors + Sizes

Colors	3"x12"	3"x12" Bullnose
GLACIER	1104966	1105207
MOON	1104971	1105212
DESERT	1104970	1105211
SKY	1104967	1105208
FOREST	1104969	1105210
OCEAN	1104968	1105209

Colors shown may vary from actual product.
Final selection should be made from actual product samples.

Technical Specifications

This product meets or exceeds all standards described in ANSI A137.1.
Este producto cumple o excede todos los estandares de ANSI A137.1.

	SPECS	TEST METHOD	INDUSTRY STANDARD	MILE®stone VALUES	
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.5%	
	SURFACE WEAR RESISTANCE	ANSI A137.1	Surface Wear-resistance properties of glazed vitreous and porcelain tiles.	ALL RESIDENTIAL / COMMERCIAL	
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. Sample must show no visible defects.	NOT AFFECTED	
	D.C.O.F. AcuTest®	ANSI A326.3	INDOOR ≥0.42 WET	≥0.42 WET (MATTE SURFACES)	
			OUTDOOR >0.55 WET	>0.55 WET (2CM & GRIP)	
	STAIN RESISTANCE	ASTM C137 8	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED	
	BREAKING STRENGTH GAUGED PORCELAIN 6MM	ASTM C1505	≥175 lbf	≥200 lbf	
	BREAKING STRENGTH	ASTM C648	≥275 lbf	≥300 lbf	
	BREAKING STRENGTH OUTDOOR 2CM	ASTM 1505	2000 lbf (10.9 kN)	≥2500 lbf	
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT	
	WARPAGE EDGE	ASTM C485	±0.40% or ±0.05 in (±1.8 mm)	± 0.40%	Rectified
	WARPAGE DIAGONAL	ASTM C485	±0.40% or ±0.07 in (±1.8 mm)	± 0.40%	Rectified
	WEDGING	ASTM C502	±0.25% or ±0.03 in (±0.8 mm)	± 0.25%	Rectified
	WARPAGE EDGE	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WARPAGE DIAGONAL	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WEDGING	ASTM C502	±0.50% or ±0.08 in (±2.0 mm)	± 0.50%	Calibrated
	THICKNESS GAUGED PORCELAIN	ASTM C499	Range: ± 0.02 in	≤0.02 in	
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in	
	LENGTH / WIDTH VARIATION	ASTM C499	±0.25% or ±0.03 in (±0.8 mm)	±0.25%	

• Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs.

MADE IN THE USA



35-02 Northern Boulevard, Long Island City NY 11101

www.hometilecenterofny.com

(718) 361-9401

