



Aegina

Aegina







colors



Aegina / IVORY



Aegina / SMOKE



Aegina/ MULTICOLOR


₂ Aegina

Available in 6"x36" and 24"x24" along with coordinating 3"x36" bullnose and two variations of mosaics, this tile provides you with the opportunity to express your own ingenuity.



4 Aegina



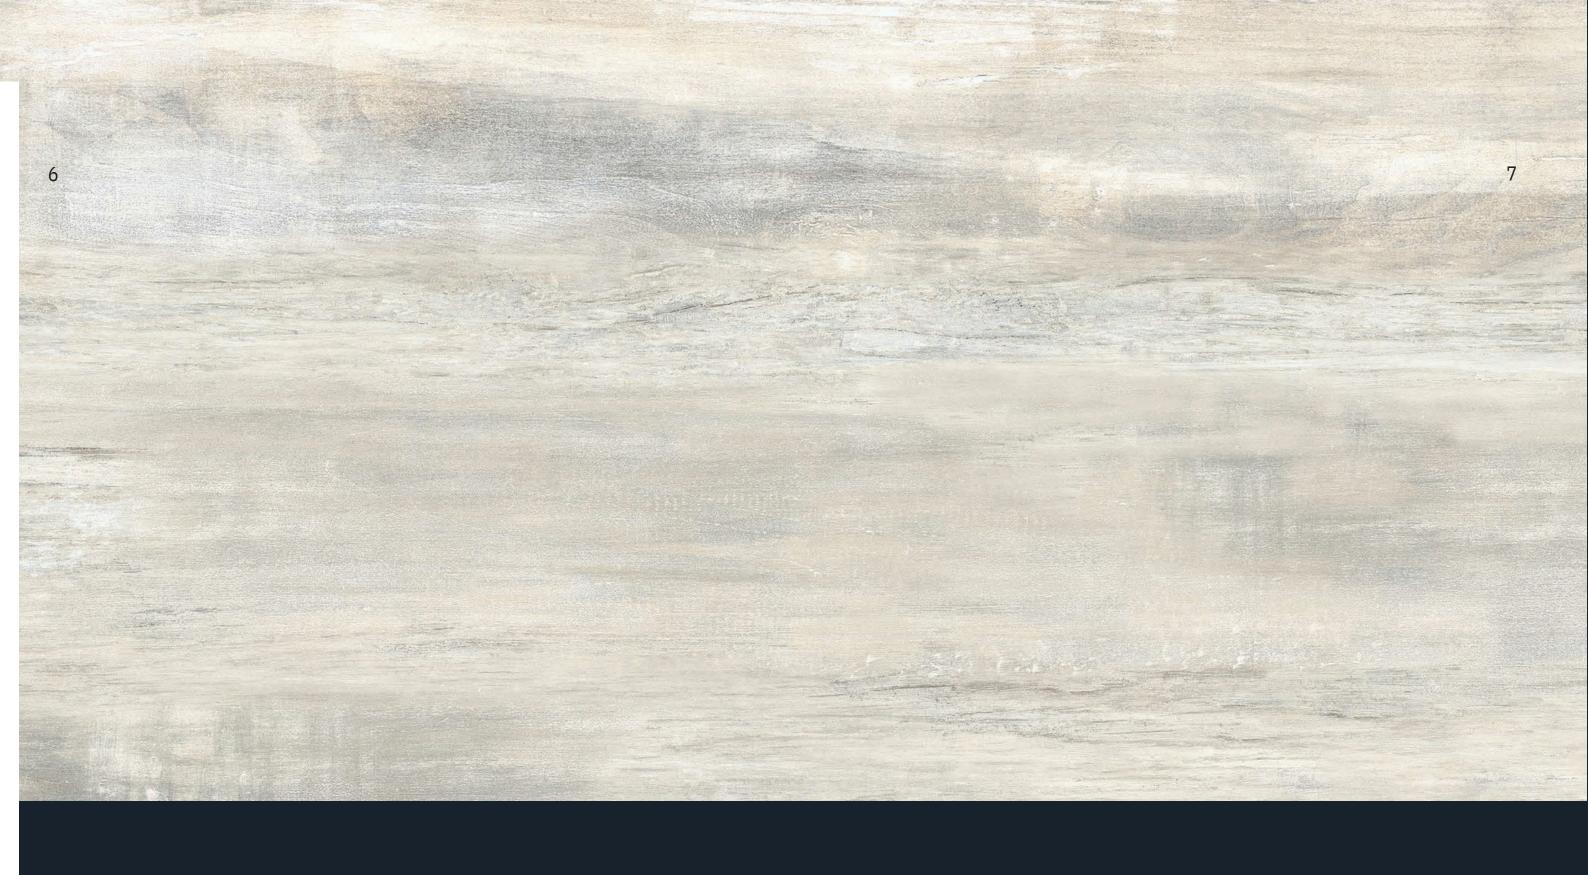












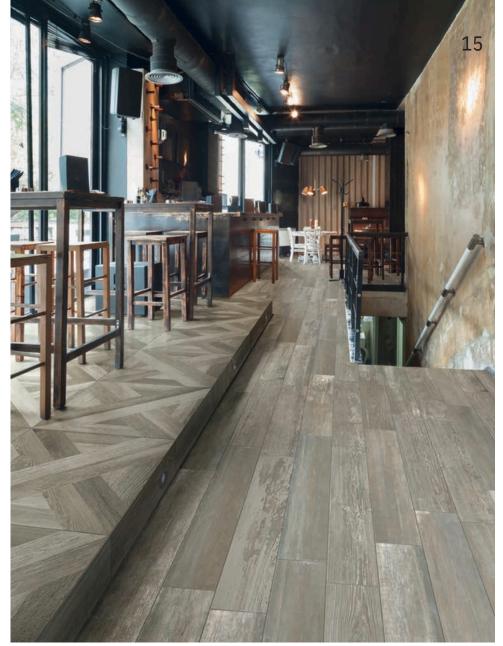

24"x24" basketweave . 6"x36" / SMOKE

The 24"x24" can be used alone or in a pattern with the other sizes for a unique installation; while the rectified format allows you to achieve tighter grout joints that more closely represent the natural product.










sizes:

24"x24" Basketweave Rectified



1100148 Multicolor 1100149 Ivory 1100150 Smoke

6"x36" Rectified

1100145 Multicolor 1100146 Ivory 1100147 Smoke

Colors shown may vary from actual product.
Final selection should be made from actual product samples.

mosaics & trim pieces:

12"x12" Mosaic Strips



1100151 Multicolor 1100152 Ivory 1100153 Smoke


Linear Mosaic



1100154 Multicolor 1100155 Ivory 1100156 Smoke

3"x36"Bullnose

1100157 Multicolor 1100158 Ivory 1100159 Smoke





SLIGHT VARIATION

Clearly distinguishable differences in texture and/or pattern with similar



VARIATION While the colors present on a single piece of tile will be indicative of the colors to be

expected on the other tiles, the amount of colors on each piece will vary significantly.



VARIATION Random color differences from tile to tile, so that

one tile may have totally different colors from that on other tiles. Thus, the final

installation will be unique.



Technical Specifications

This product meets or exceeds all standards described in ANSI A137.1 & A137.3. Este product cumple o exceed todos los estandares de ANSI A137.1 & A137.3.

| | SPECS | TEST METHOD | INDUSTRY STANDARD | MILE®stone VALUES | |
|----------|---------------------------------------|----------------------|--|---------------------------------|------------|
| | WATER ABSORPTION | ASTM C373 | ≤0.5% | ≤0.5% | |
| * | SURFACE WEAR RESISTANCE | ANSI A137.1 | Surface Wear-resistance properties of glazed vitreous and porcelain tiles. | ALL RESIDENTIAL / COMMERCIAL | |
| ^ | CHEMICAL RESISTANCE | ASTM C650 | A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. Sample must show no visible defects. | NOT AFFECTED | |
| * | D.C.O.F. AcuTest® | ANSI A326.3 | INDOOR ≥0.42 WET | ≥0.42 WET | |
| | | | OUTDOOR >0.55 WET | >0.55 WET 2 | CM & GRIP |
| * | STAIN RESISTANCE | ASTM C1378 | Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning. | NOT AFFECTED | |
| | BREAKING STRENGTH GAUGED PORCELAIN | ASTM C1505 | ≥175 lbf | ≥200 lbf | |
| <u> </u> | BREAKING STRENGTH | ASTM C648 ASTM | ≥275 lbf | ≥300 lbf | |
| | BREAKING STRENGTH OUTDOOR 2CM | 1505 | 2000 lbf (10.9 kN) | ≥2500 lbf | |
| * | RESISTANCE TO FREEZE | ASTM C1026 | A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects. | RESISTANT | |
| | WARPAGE EDGE | ASTM C485 | ±0.40% or ±0.05 in (±1.8 mm) | ± 0.40% | Rectified |
| | WARPAGE DIAGONAL | ASTM C485 | ±0.40% or ±0.07 in (±1.8 mm) | ± 0.40% | Rectified |
| Н | WEDGING | ASTM C502 | ±0.25% or ±0.03 in (±0.8 mm) | ± 0.25% | Rectified |
| | WARPAGE EDGE | ASTM C485 | ±0.50% or ±0.07 in (±1.8 mm) | ± 0.50% | Calibrated |
| | WARPAGE DIAGONAL | ASTM C485 | ±0.50% or ±0.07 in (±1.8 mm) | ± 0.50% | Calibrated |
| <u></u> | WEDGING | ASTM C502 | ±0.50% or ±0.08 in (±2.0 mm) | ± 0.50% | Calibrated |
| <u> </u> | THICKNESS | ASTM C499 | Range: ± 0.04 in | ≤0.04 in | |

[•] Due to the inherent nature of fired porcelain tile, it is important to note that the coefficent of friction may vary within and between product runs.





35-02 Northern Boulevard, Long Island City, NY 11101 www.hometilecenterofny.com (718) 361-9401

