





# Skopelos



## colors

Skopelos / **WHITE**



Skopelos / **HONEY**



Skopelos / **GREY**



Skopelos / **NUT**



Skopelos / **BROWN**



# 2|Skopelos

---

Transform your residential and commercial project with the elegant look of natural wood with the Skopelos collection. Combining a sleek, matte finish with an array of five warm color compositions, Skopelos provides the durability of porcelain tile with the authentic look of wood popular in modern interior design.

---






Skopelos / CASSETTONE DÉCOR #1 p.14



Skopelos / CASSETTONE DÉCOR #2 p.20

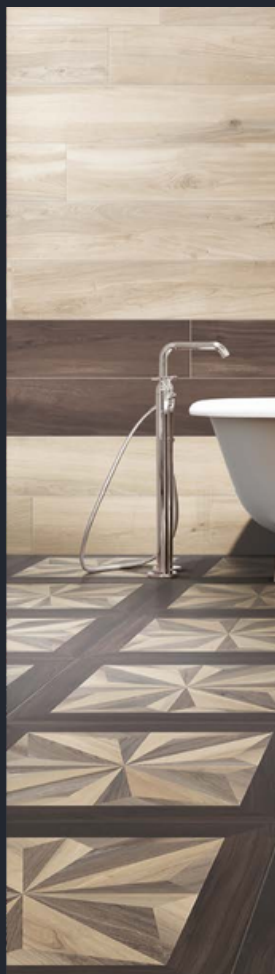

# CASSETTONE DÉCOR



## colors

Skopelos / **CASSETTONE DÉCOR #1**



Skopelos / **CASSETTONE DÉCOR #2**



Skopelos / **CASSETTONE DÉCOR #3**



Skopelos / **CASSETTONE DÉCOR #4**




# CASSETTONE DÉCOR

---

The merging of modern, sophisticated wooden tile with the classic, natural look of wood paneling, Cassettone Décor is a new approach to a contemporary taste. Featuring geometric sequences with multiple shades that pay homage to the essence of furnishing items, Cassettone Décor perfectly provides a peaceful, welcoming feel. Available in one size (24"x24") and 4 color combinations, the Cassettone Décor can be used by itself or combine with anyone of the 5 colors of Skopelos Collection.

---



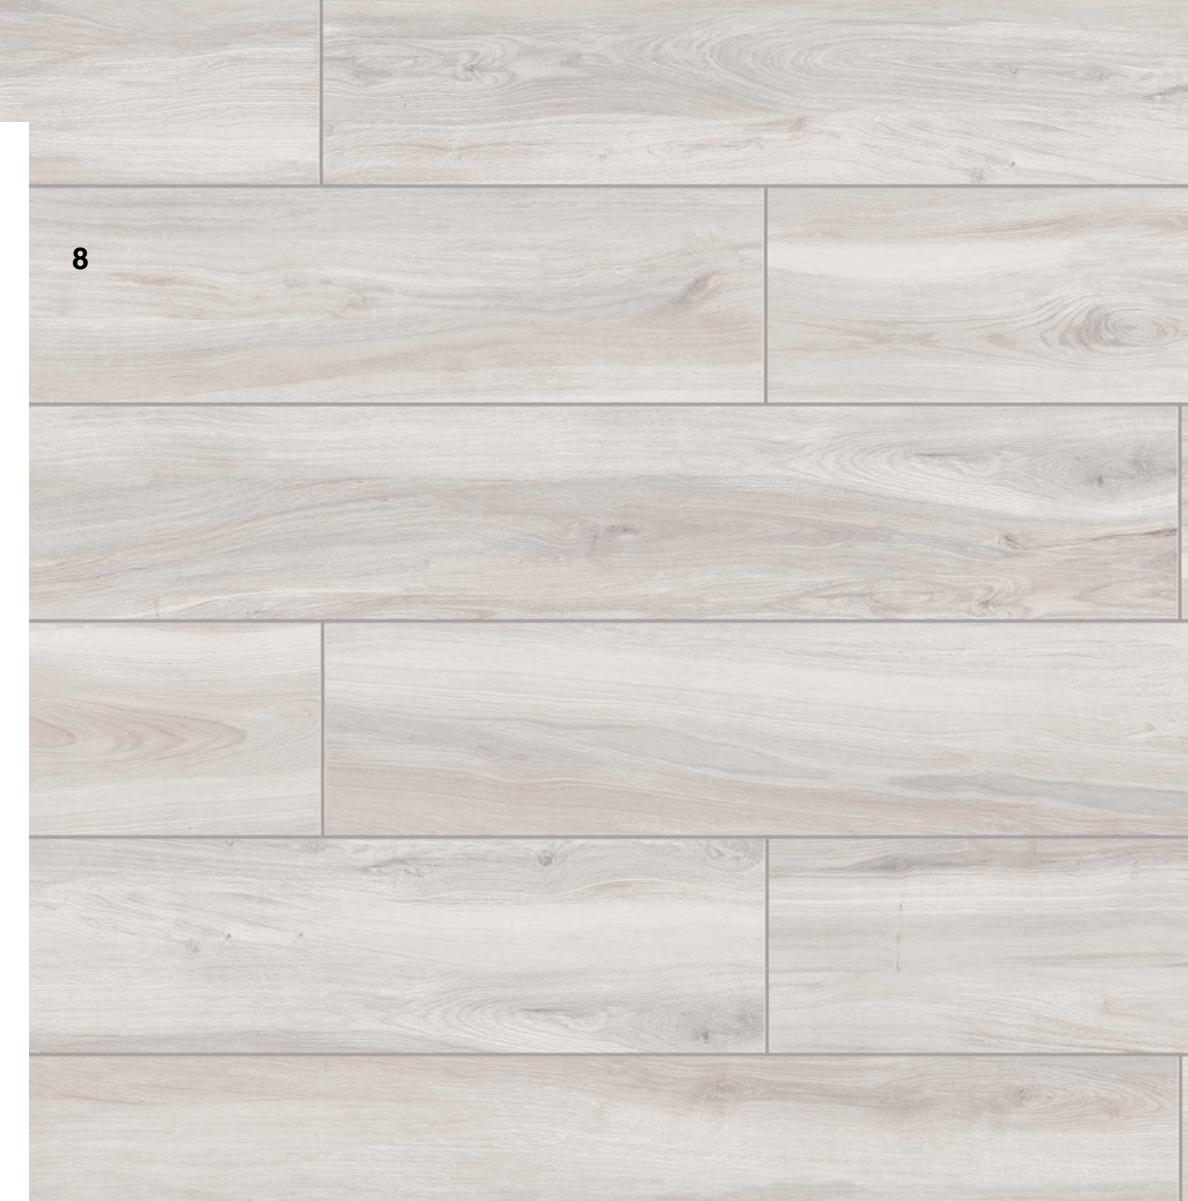

Skopelos / *WHITE*

# 10Skopelos



6"x36" . 8"x48" / **WHITE**



6"x36". 8"x48" / **WHITE** . cassettoni Décor 1 24"x24"











# 16Skopelos



12"x48" / **WHITE OUTDOOR #2**

**OUTDOOR  
#2**

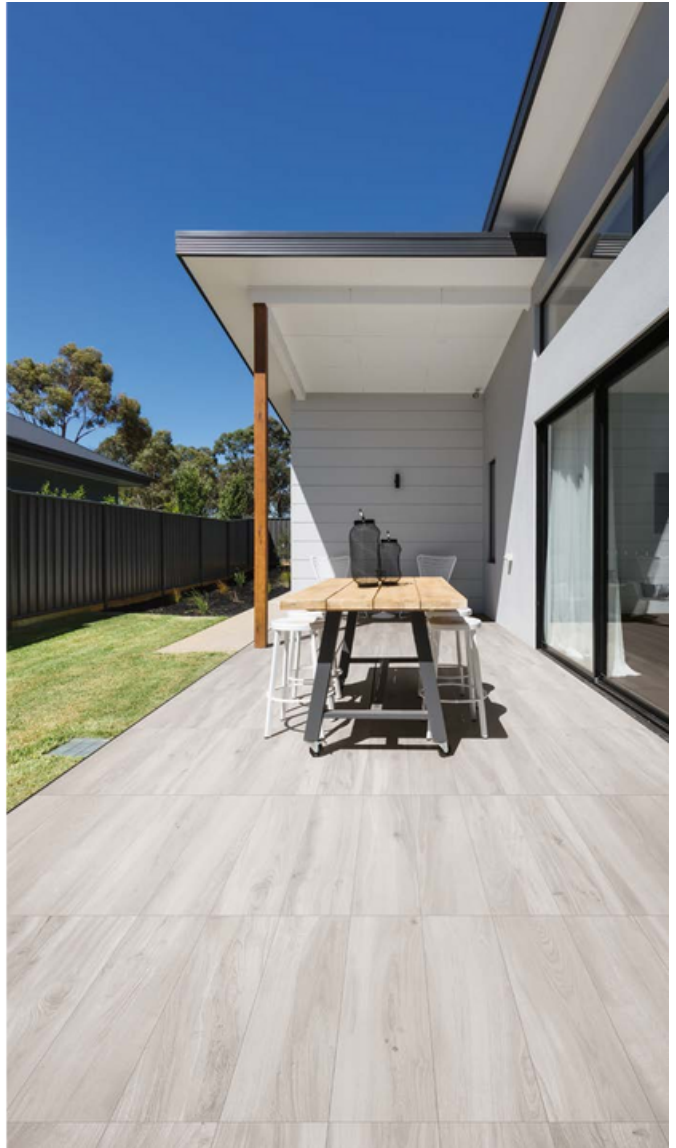

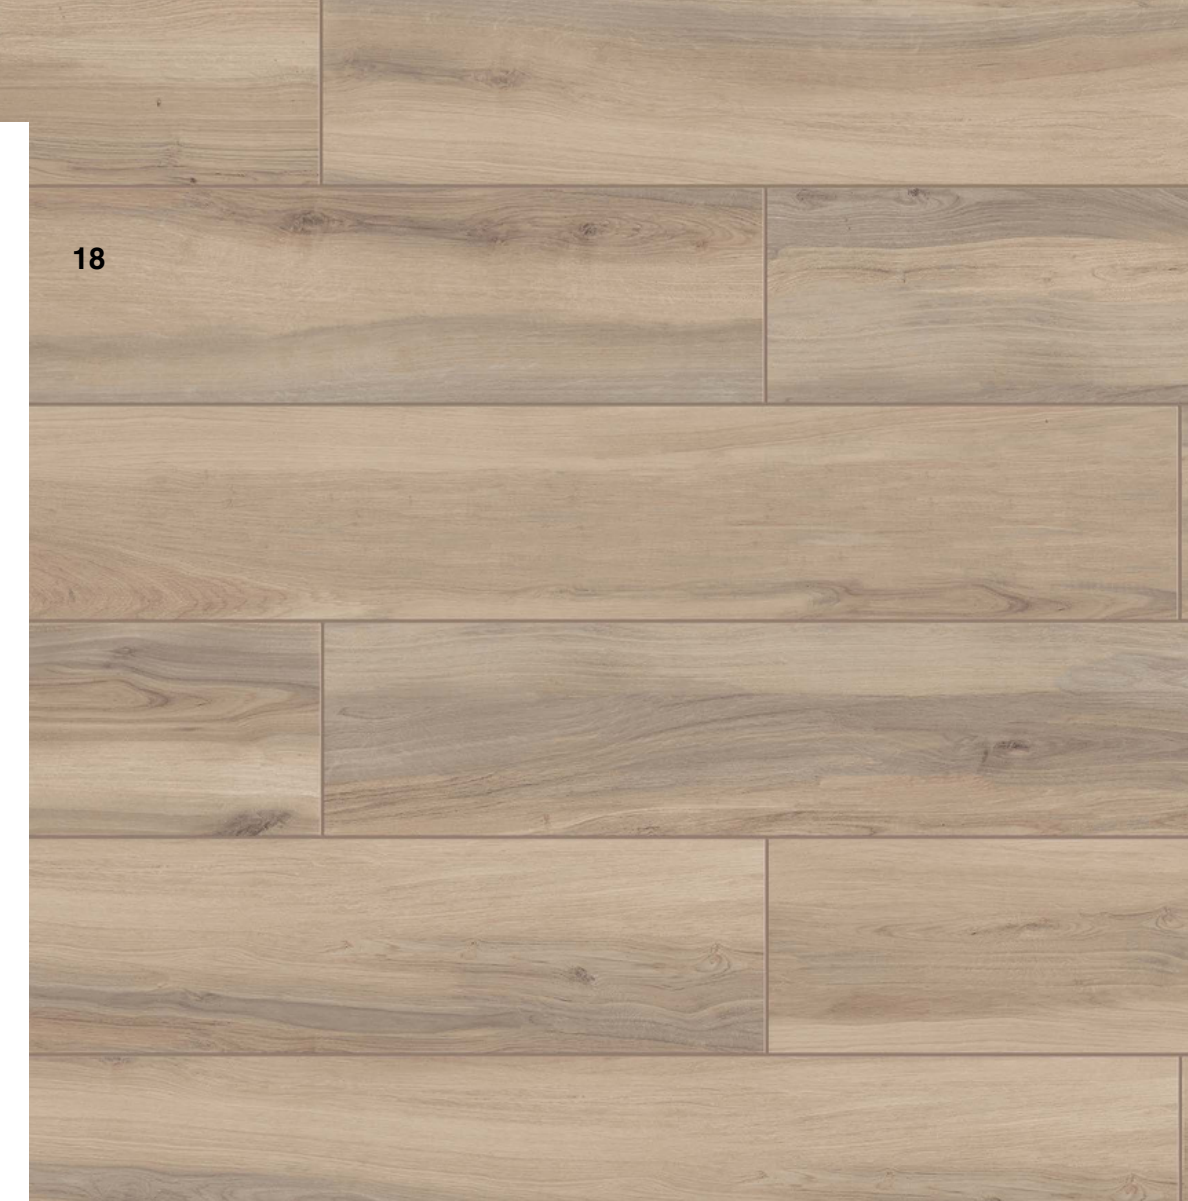

Skopelos / ***HONEY***

# 20Skopelos



8"x48" / **HONEY** . cassettoni Décor 2 24"x24"









**OUTDOOR  
#2**



6"x36" / **BROWN** . 12"x48" / **HONEY OUTDOOR #2**





# 28Skopelos




12"x48" / HONEY OUTDOOR #2

**OUTDOOR  
#2**







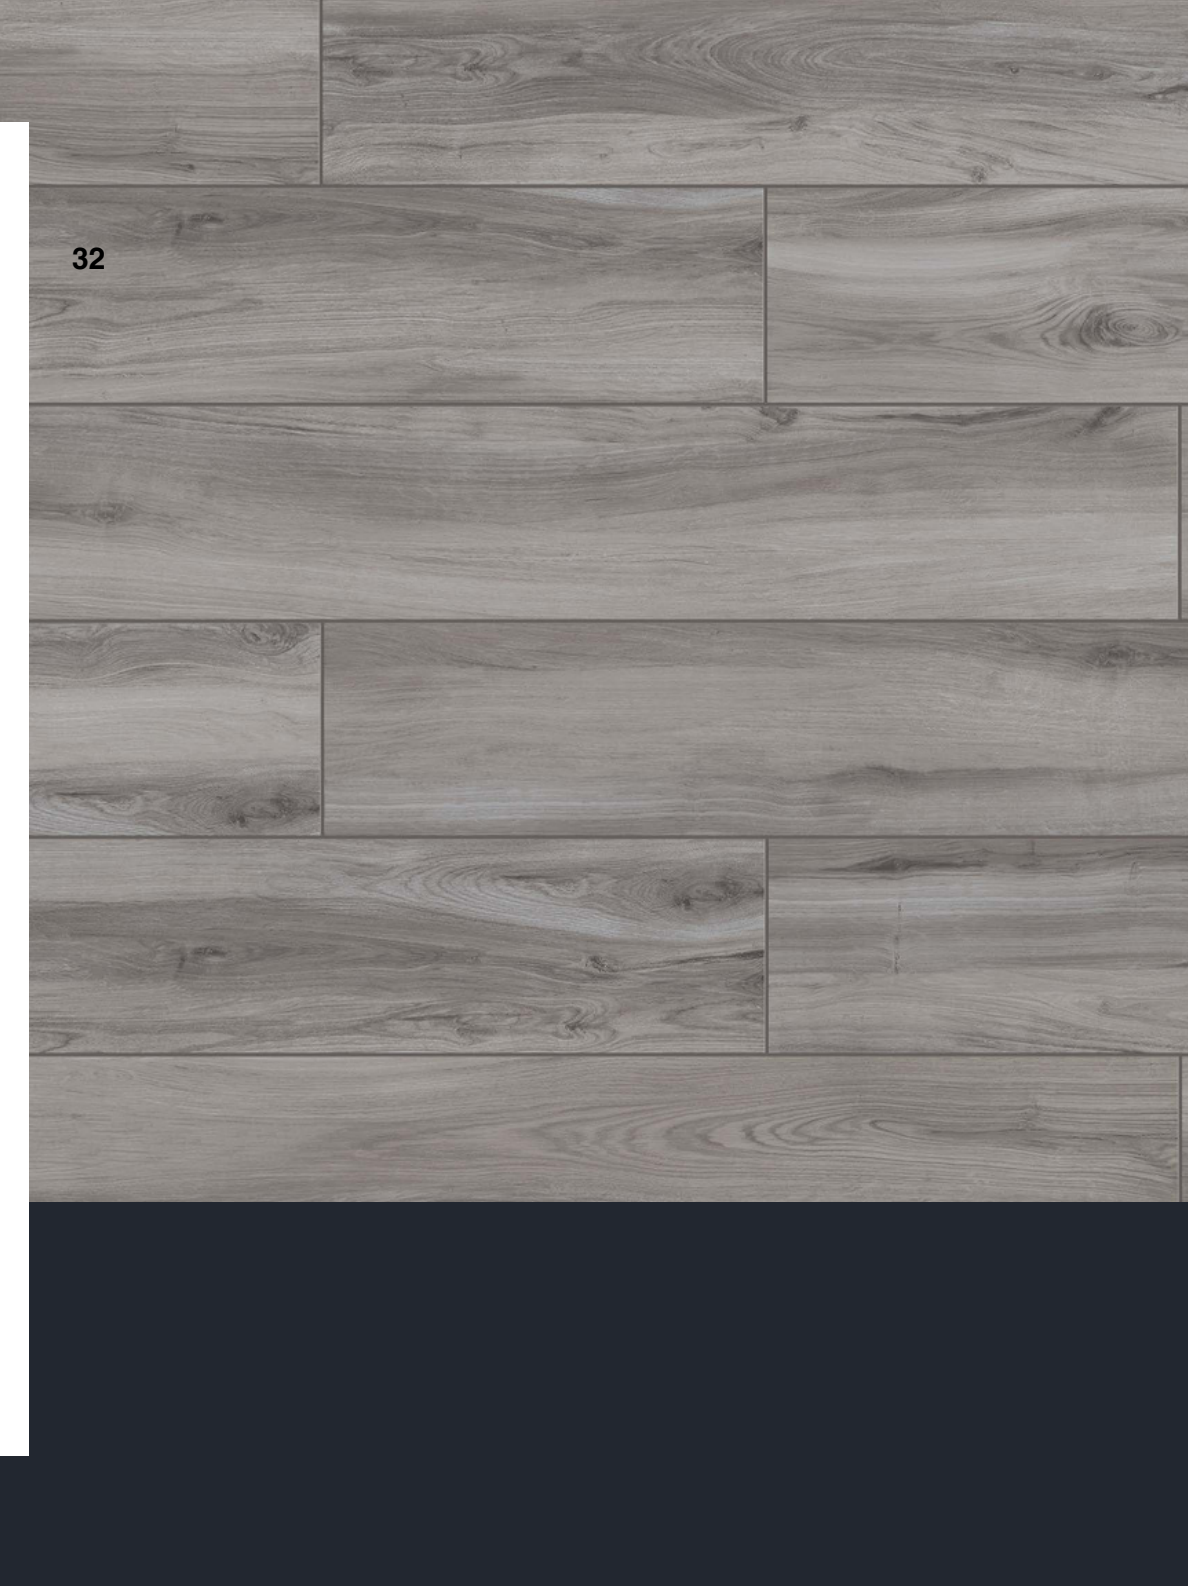

Skopelos / ***GREY***

# 34Skopelos



8"x48" / GREY



36

8"x48" / GREY




# 38Skopelos




12"x48" / GREY OUTDOOR #2

**OUTDOOR  
#2**

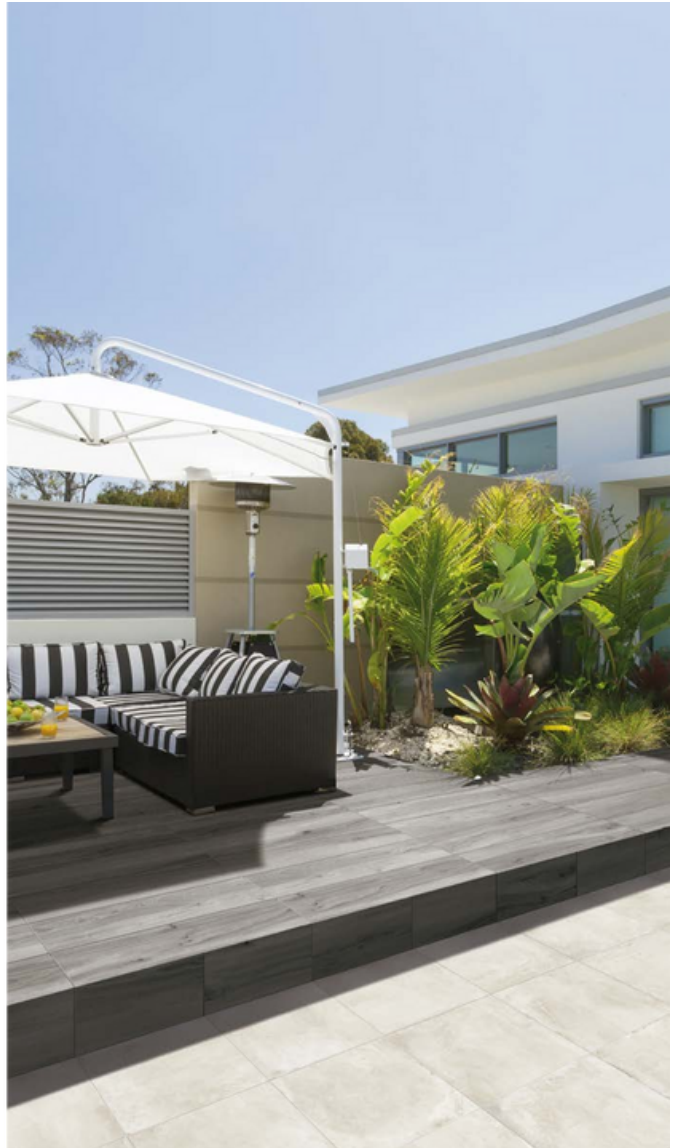

40

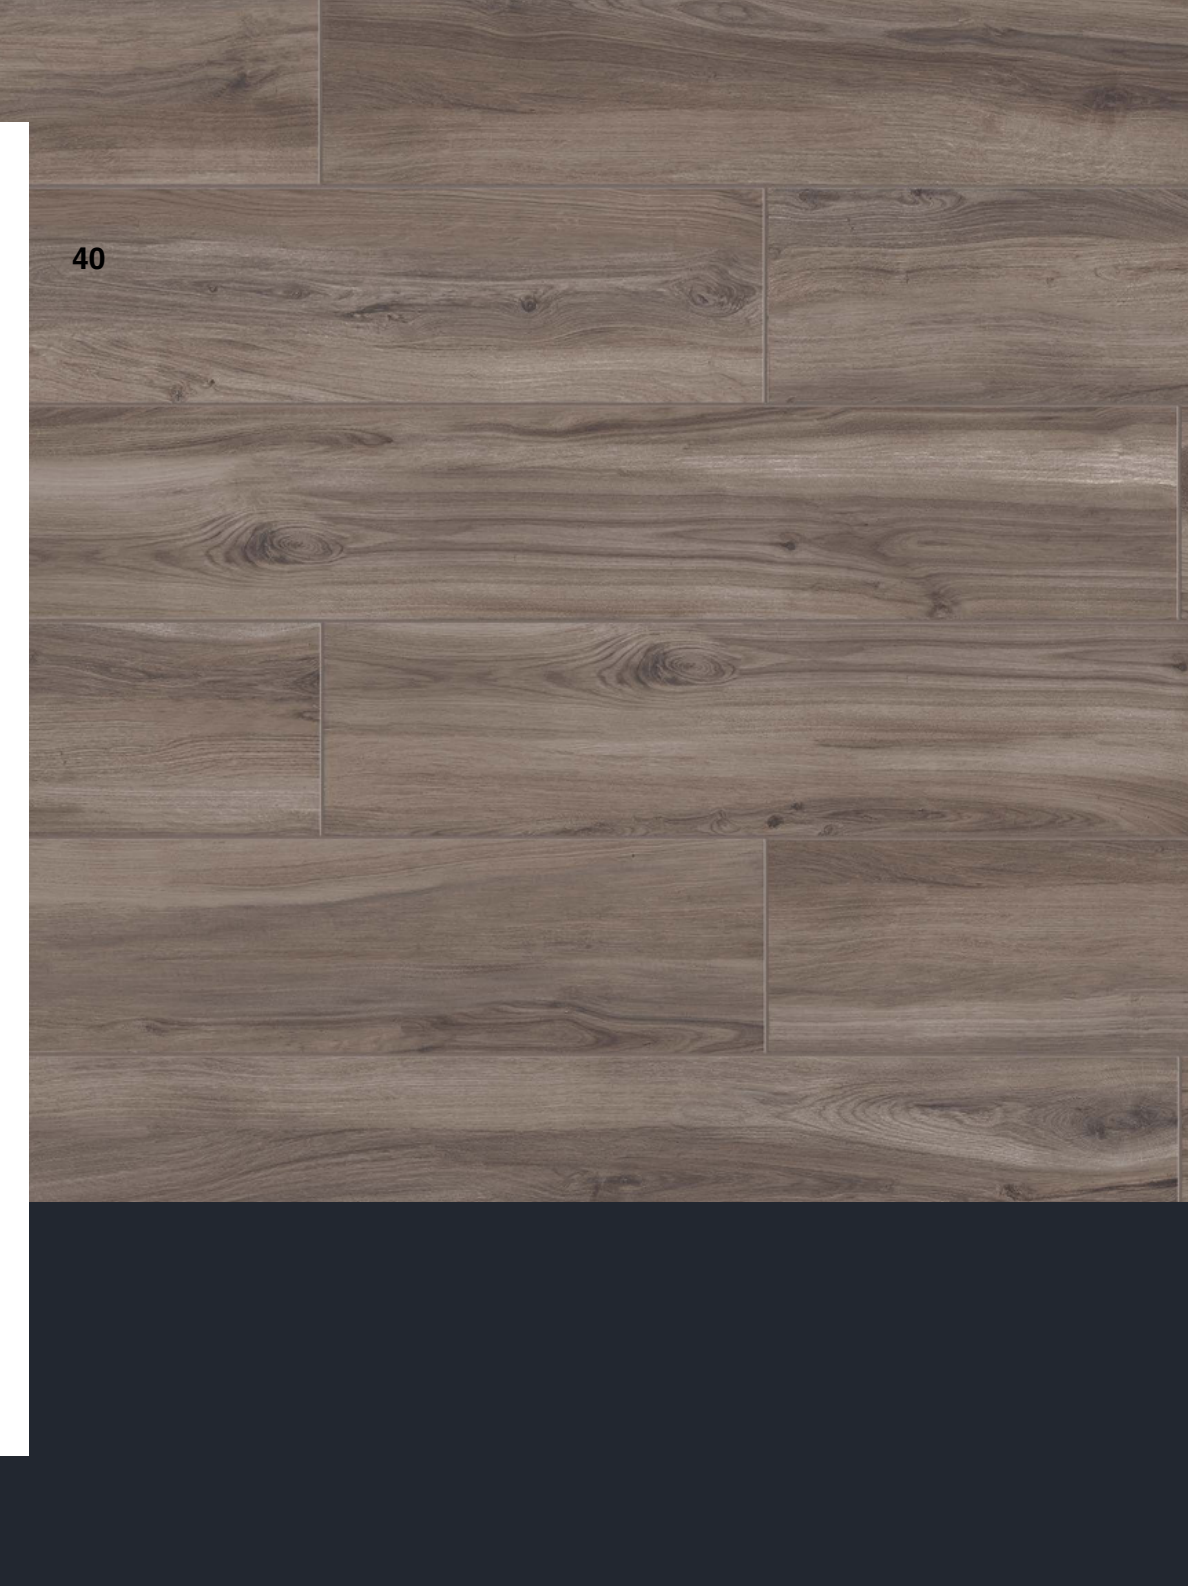

Skopelos / ***NUT***

# 42Skopelos







45

Skopelos / ***BROWN***

# 46Skopelos



6"x36" / **BROWN**



# SIZES & SHADE VARIATION

48

sizes:

6"x36"

Rectified / Matte



1100803 White  
1100804 Honey  
1100805 Nut  
1100806 Brown  
1100807 Grey

8"x48"

Rectified / Matte



1100788 White  
1100789 Honey  
1100790 Nut  
1100791 Brown  
1100792 Grey

24"x24"

CASSETTONE DÉCOR

Rectified / Matte



1100839 White / Grey  
Cassettone Décor 1



1100840 Honey / Nut  
Cassettone Décor 2



1100841 Honey / Nut / Brown  
Cassettone Décor 3



1100845 Nut/ Brown  
Cassettone Décor 4

## OUTDOOR #2

12"x48"

Rectified / Matte



1100818 White  
1100819 Honey  
1100822 Grey

Colors shown may vary from  
actual product.  
Final selection should be made  
from actual product samples.

mosaics & trim pieces:  
12"x15"  
Herringbone Mosaic Matte




- 1100828 White
- 1100829 Honey
- 1100830 Nut
- 1100831 Brown
- 1100832 Grey

3"x36"  
Bullnose / Matte




- 1100823 White
- 1100824 Honey
- 1100825 Nut
- 1100826 Brown
- 1100827 Grey



V1

UNIFORM APPEARANCE  
Differences among pieces from the same production run are minimal.



V2

SLIGHT VARIATION  
Clearly distinguishable differences in texture and/or pattern with similar colors.



V3

MODERATE VARIATION  
While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece will vary significantly.



V4

SUBSTANTIAL VARIATION  
Random color differences from tile to tile, so that one tile may have totally different colors from that on other tiles. Thus, the final installation will be unique.



15"x12" Herringbone mosaic **HONEY** .6"x36" / NUT

# Technical Specifications

***This product meets or exceeds all standards described in ANSI A137.1 & A137.3.***

***Este producto cumple o excede todos los estandares de ANSI A137.1 & A137.3.***

|                                                                                     | SPECS                              | TEST METHOD | INDUSTRY STANDARD                                                                                                              | MILE®stone VALUES            |            |
|-------------------------------------------------------------------------------------|------------------------------------|-------------|--------------------------------------------------------------------------------------------------------------------------------|------------------------------|------------|
|    | WATER ABSORPTION                   | ASTM C373   | ≤0.5%                                                                                                                          | ≤0.5%                        |            |
|    | SURFACE WEAR RESISTANCE            | ANSI A137.1 | Surface Wear-resistance properties of glazed vitreous and porcelain tiles.                                                     | ALL RESIDENTIAL / COMMERCIAL |            |
|    | CHEMICAL RESISTANCE                | ASTM C650   | A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. Sample must show no visible defects.   | NOT AFFECTED                 |            |
|    | D.C.O.F. AcuTest®                  | ANSI A326.3 | INDOOR ≥0.42 WET                                                                                                               | ≥0.42 WET                    |            |
|                                                                                     |                                    |             | OUTDOOR ≥0.55 WET                                                                                                              | >0.55 WET 2CM & GRIP         |            |
|    | STAIN RESISTANCE                   | ASTM C1378  | Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning. | NOT AFFECTED                 |            |
|    | BREAKING STRENGTH GAUGED PORCELAIN | ASTM C1505  | ≥175 lbf                                                                                                                       | ≥200 lbf                     |            |
|                                                                                     | BREAKING STRENGTH                  | ASTM C648   | ≥275 lbf                                                                                                                       | ≥300 lbf                     |            |
|                                                                                     | BREAKING STRENGTH OUTDOOR 2CM      | ASTM 1505   | 2000 lbf (10.9 kN)                                                                                                             | ≥2500 lbf                    |            |
|    | RESISTANCE TO FREEZE               | ASTM C1026  | A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.                 | RESISTANT                    |            |
|    | WARPAGE EDGE                       | ASTM C485   | ±0.40% or ±0.05 in ( ±1.8 mm)                                                                                                  | ± 0.40%                      | Rectified  |
|    | WARPAGE DIAGONAL                   | ASTM C485   | ±0.40% or ±0.07 in (±1.8 mm)                                                                                                   | ± 0.40%                      | Rectified  |
|    | WEDGING                            | ASTM C502   | ±0.25% or ±0.03 in (±0.8 mm)                                                                                                   | ± 0.25%                      | Rectified  |
|   | WARPAGE EDGE                       | ASTM C485   | ±0.50% or ±0.07 in (±1.8 mm)                                                                                                   | ± 0.50%                      | Calibrated |
|  | WARPAGE DIAGONAL                   | ASTM C485   | ±0.50% or ±0.07 in (±1.8 mm)                                                                                                   | ± 0.50%                      | Calibrated |
|  | WEDGING                            | ASTM C502   | ±0.50% or ±0.08 in (±2.0 mm)                                                                                                   | ± 0.50%                      | Calibrated |
|  | THICKNESS                          | ASTM C499   | Range: ± 0.04 in                                                                                                               | ≤0.04 in                     |            |

- Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and **between product runs**.



**35-02 Northern Boulevard, Long Island City, N.Y. 11101**

**[www.hometilecenterofny.com](http://www.hometilecenterofny.com)**

**(718) 361-9401**