

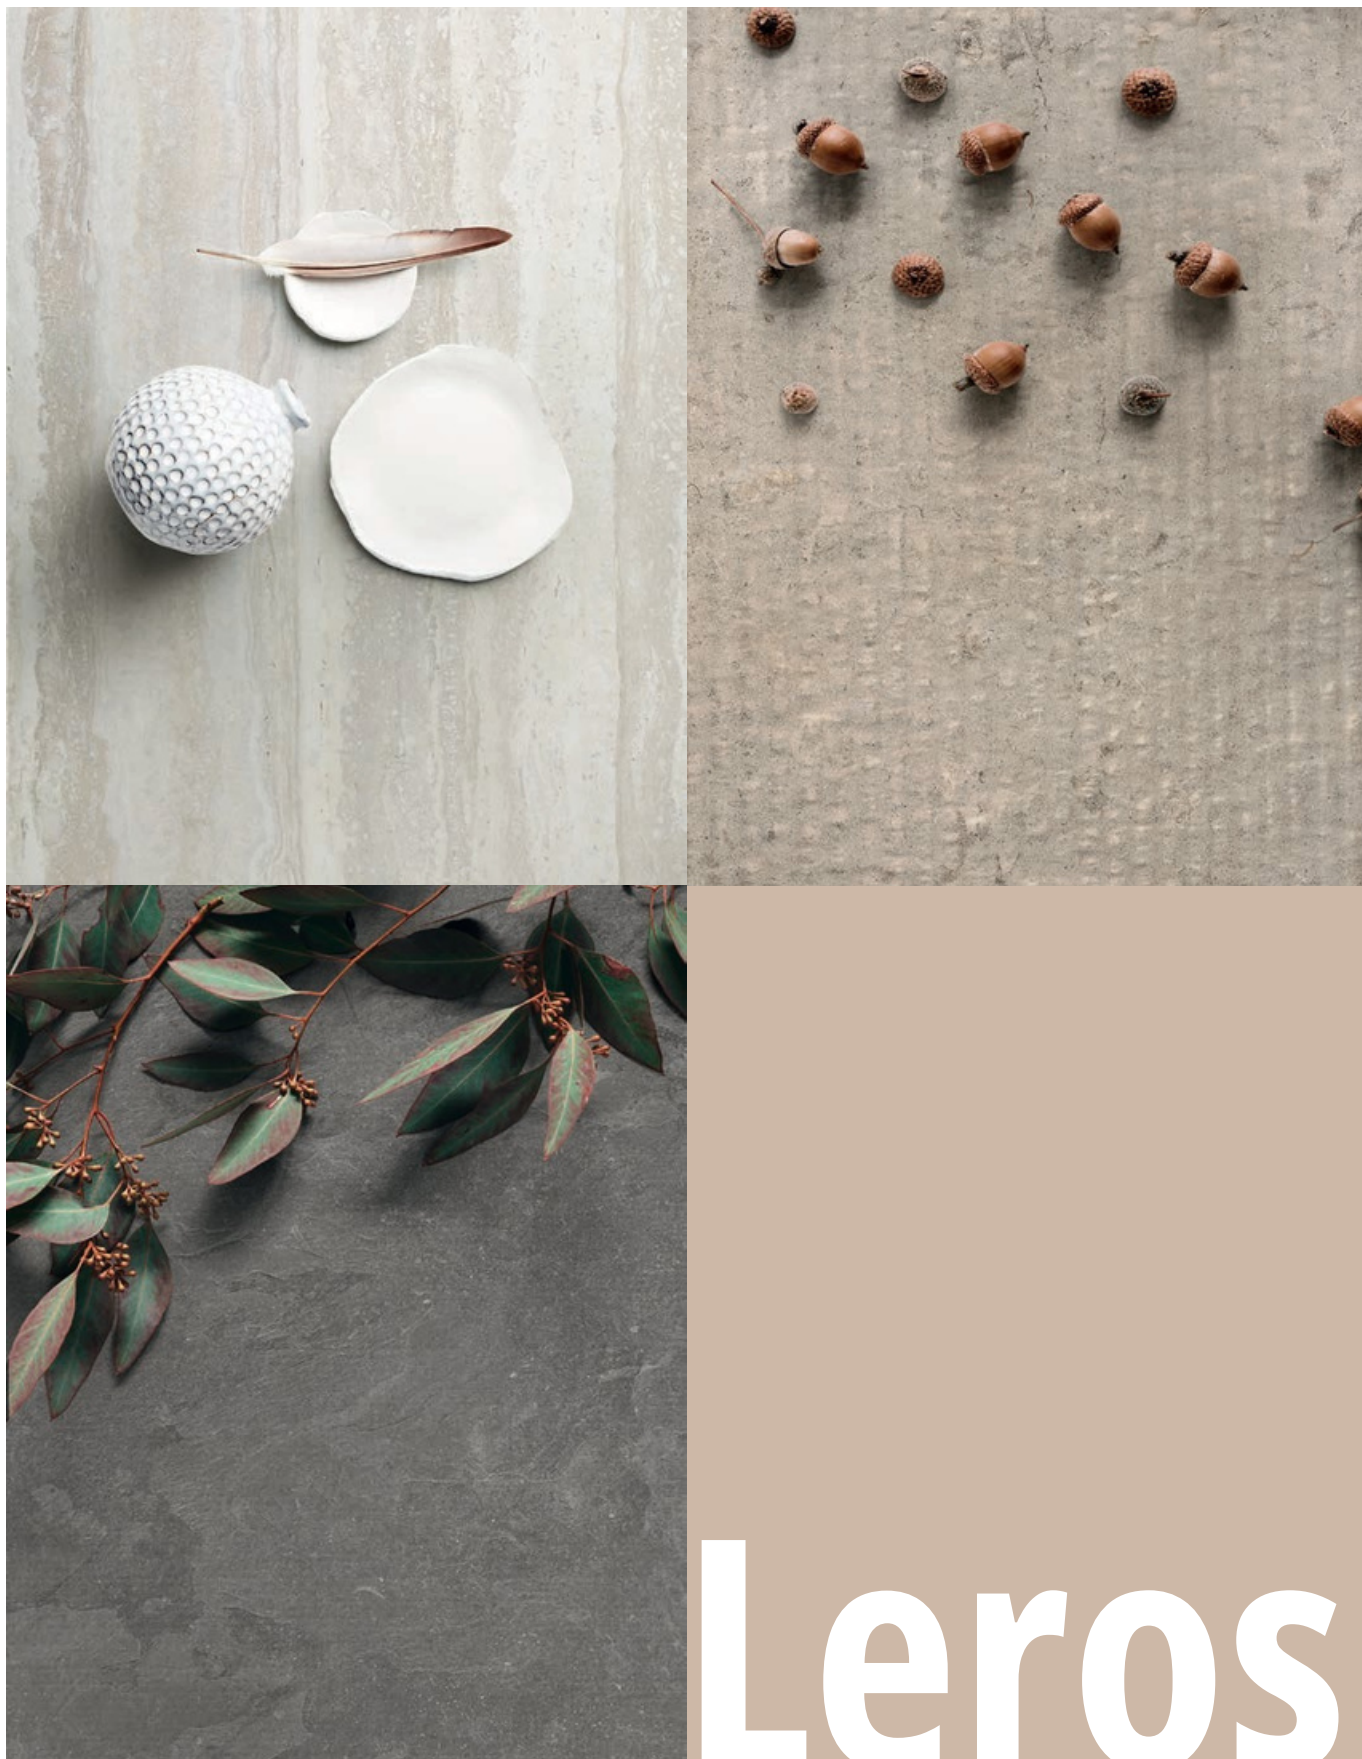






Leros

Designed to connect the inside and outside of the home, Leros serves the entirety of spaces and is the epitome of the duality of nature.

With three natural stone faces to choose from, it embodies humanity's desire to reconnect with the natural environment around them.

It combines a timeless design with graphically modernized appeal and is the meeting place between the serenity of nature, and the comfort of home.

Create your escape, and embrace the harmony of duality with Leros.



Leros

HEIRLOOM BLUE
ANTIQUE CREAM
LEGACY WHITE

3 FINISHES:
MATTE
CHISELED
2CM OUTDOOR

5 SIZES:

		INDOOR
12"x24"	24"x48"	

		2 CM OUTDOOR
12"x12"	12"x24"	24"x36"
24"x24"	24"x48"	

FLOOR IN: Leros_12"x24"_HEIRLOOM BLUE_MATTE

FLOOR OUT: Leros_12"x24"_HEIRLOOM BLUE_2 CM



HEIRLOOM BLUE

- 1103542

MATTE_12"x24"
- 1103524

MATTE_24"x48"
- 1103545

CHISELED_12"x24"
- 1103527

CHISELED_24"x48"
- 1103548

MATTE MOSAIC_12"x12"
- 1103551

MATTE BULLNOSE_3"x12"
- 1103581

2 CM_12"x12"
- 1103578

2 CM_12"x24"
- 1103575

2 CM_24"x24"
- 1103585

2 CM_24"x36"
- 1103563

2 CM_24"x48"



ANTIQUE CREAM

- 1103541

MATTE_12"x24"
- 1103523

MATTE_24"x48"
- 1103544

CHISELED_12"x24"
- 1103526

CHISELED_24"x48"
- 1103547

MATTE MOSAIC_12"x12"
- 1103550

MATTE BULLNOSE_3"x12"
- 1103580

2 CM_12"x12"
- 1103577

2 CM_12"x24"
- 1103574

2 CM_24"x24"
- 1103584

2 CM_24"x36"
- 1103562

2 CM_24"x48"



LEGACY WHITE

- 1103540

MATTE_12"x24"
- 1103522

MATTE_24"x48"
- 1103543

CHISELED_12"x24"
- 1103525

CHISELED_24"x48"
- 1103546

MATTE MOSAIC_12"x12"
- 1103549

MATTE BULLNOSE_3"x12"
- 1103579

2 CM_12"x12"
- 1103576

2 CM_12"x24"
- 1103573

2 CM_24"x24"
- 1103582

2 CM_24"x36"
- 1103561

2 CM_24"x48"

Leros



FLOOR IN: Leros_12"x24"_HEIRLOOM BLUE_MATTE



WALL IN: Leros_24"x48"_HEIRLOOM BLUE_CHISELED

FLOOR IN: Leros_24"x48"_HEIRLOOM BLUE_MATTE



FLOOR IN: Leros_12"x24" - 24"x48"_HEIRLOOM BLUE_MATTE



FLOOR OUT: Leros_12"x12" - 12"x24" - 24"x24" - 24"x36"_HEIRLOOM BLUE_2 CM



WALL IN: Leros_24"x48"_ANTIQUE CREAM_CHISELED

FLOOR IN: Leros_24"x48"_ANTIQUE CREAM_MATTE

FLOOR OUT: Leros_24"x24"_ANTIQUE CREAM_2 CM



FLOOR OUT: Leros_24"x48"_ANTIQUÉ CREAM_2 CM



FLOOR IN: Leros_12"x24"_ANTIQUÉ CREAM_MATTE

FLOOR OUT: Leros_24"x24"_ANTIQUÉ CREAM_2 CM



FLOOR OUT: Leros_24"x48"_ANTIQUE CREAM_2 CM FLOOR

OUT: Leros_12"x24"_ANTIQUE CREAM_CHISELED



FLOOR IN: Leros_24"x48"_LEGACY WHITE_MATTE

FLOOR OUT: Leros_24"x48"_LEGACY WHITE_2 CM



WALL IN: Leros_24"x48"_LEGACY WHITE_CHISELED



WALL IN: Leros_12"x24"_LEGACY WHITE_CHISELED

FLOOR IN: Leros_12"x24" - 24"x48"_LEGACY WHITE_MATTE



FLOOR OUT: Leros_24"x24" - 24"x48"_LEGACY WHITE_2 CM

Rectified—color body



Colors	12"x24" 10mm	24"x48" 10mm	24"x24" 2 cm	24"x48" 2 cm	12"x12" 2 cm	12"x24" 2 cm	24"x36" 2 cm	12"x12" mosaic (2"x2")	3"x12" bullnose
HEIRLOOM BLUE	1103542 Matte 1103545 Chiseled	1103524 Matte 1103527 Chiseled	1103575	1103563	1103581	1103578	1103585	1103548 Matte	1103551 Matte
ANTIQUE CREAM	1103541 Matte 1103544 Chiseled	1103523 Matte 1103526 Chiseled	1103574	1103562	1103580	1103577	1103584	1103547 Matte	1103550 Matte
LEGACY WHITE	1103540 Matte 1103543 Chiseled	1103522 Matte 1103525 Chiseled	1103573	1103561	1103579	1103576	1103582	1103546 Matte	1103549 Matte

Technical Specifications

This product meets or exceeds all standards described in ANSI A137.1 & A137.3.
Este product cumple o exceed todos los estandares de ANSI A137.1 & A137.3.

	SPECS	TEST METHOD	INDUSTRY STANDARD	MILE®stone VALUES	
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.5%	
	SURFACE WEAR RESISTANCE	ANSI A137.1	Surface Wear-resistance properties of glazed vitreous and porcelain tiles.	ALL RESIDENTIAL / COMMERCIAL	
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. Sample must show no visible defects.	NOT AFFECTED	
	D.C.O.F. AcuTest®	ANSI A326.3	INDOOR ≥0.42 WET	≥0.42 WET	
			OUTDOOR >0.55 WET	>0.55 WET 2CM & GRIP	
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED	
	BREAKING STRENGTH GAUGED PORCELAIN	ASTM C1505	≥175 lbf	≥200 lbf	
	BREAKING STRENGTH	ASTM C648	≥275 lbf	≥300 lbf	
	BREAKING STRENGTH OUTDOOR 2CM	ASTM 1505	2000 lbf (10.9 kN)	≥2500 lbf	
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT	
	WARPAGE EDGE	ASTM C485	±0.40% or ±0.05 in (±1.8 mm)	± 0.40%	Rectified
	WARPAGE DIAGONAL	ASTM C485	±0.40% or ±0.07 in (±1.8 mm)	± 0.40%	Rectified
	WEDGING	ASTM C502	±0.25% or ±0.03 in (±0.8 mm)	± 0.25%	Rectified
	WARPAGE EDGE	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WARPAGE DIAGONAL	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WEDGING	ASTM C502	±0.50% or ±0.08 in (±2.0 mm)	± 0.50%	Calibrated
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in	

• Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs.



35-02 Northern Boulevard, Long Island City, N.Y. 11101
www.hometilecenterofny.com
(718) 361-9401

MADE IN THE USA

