

Athenian





Athenian / ALASKA GLACIER p.6



Athenian / RENOIR p.10

Athenian

colors

Athenian / **ALASKA GLACIER**



Athenian / **RENOIR**



Athenian / **CALACATTA GOLD**




Athenian / **CALACATTA GOLD** p.16


Classic and enduring, tile that captures the beauty of Italian marble. The Athenian collection is a tribute to the high-end appearance of marble. Exceptional in both look and quality, Athenian is engineered for applications where elegance is desired.







Available in three styles,
each custom-designed to
replicate the brilliance of
the world's most sought-
after stone, the attractive
look of the Athenian
collection will reveal a
deeper beauty
upon each viewing.

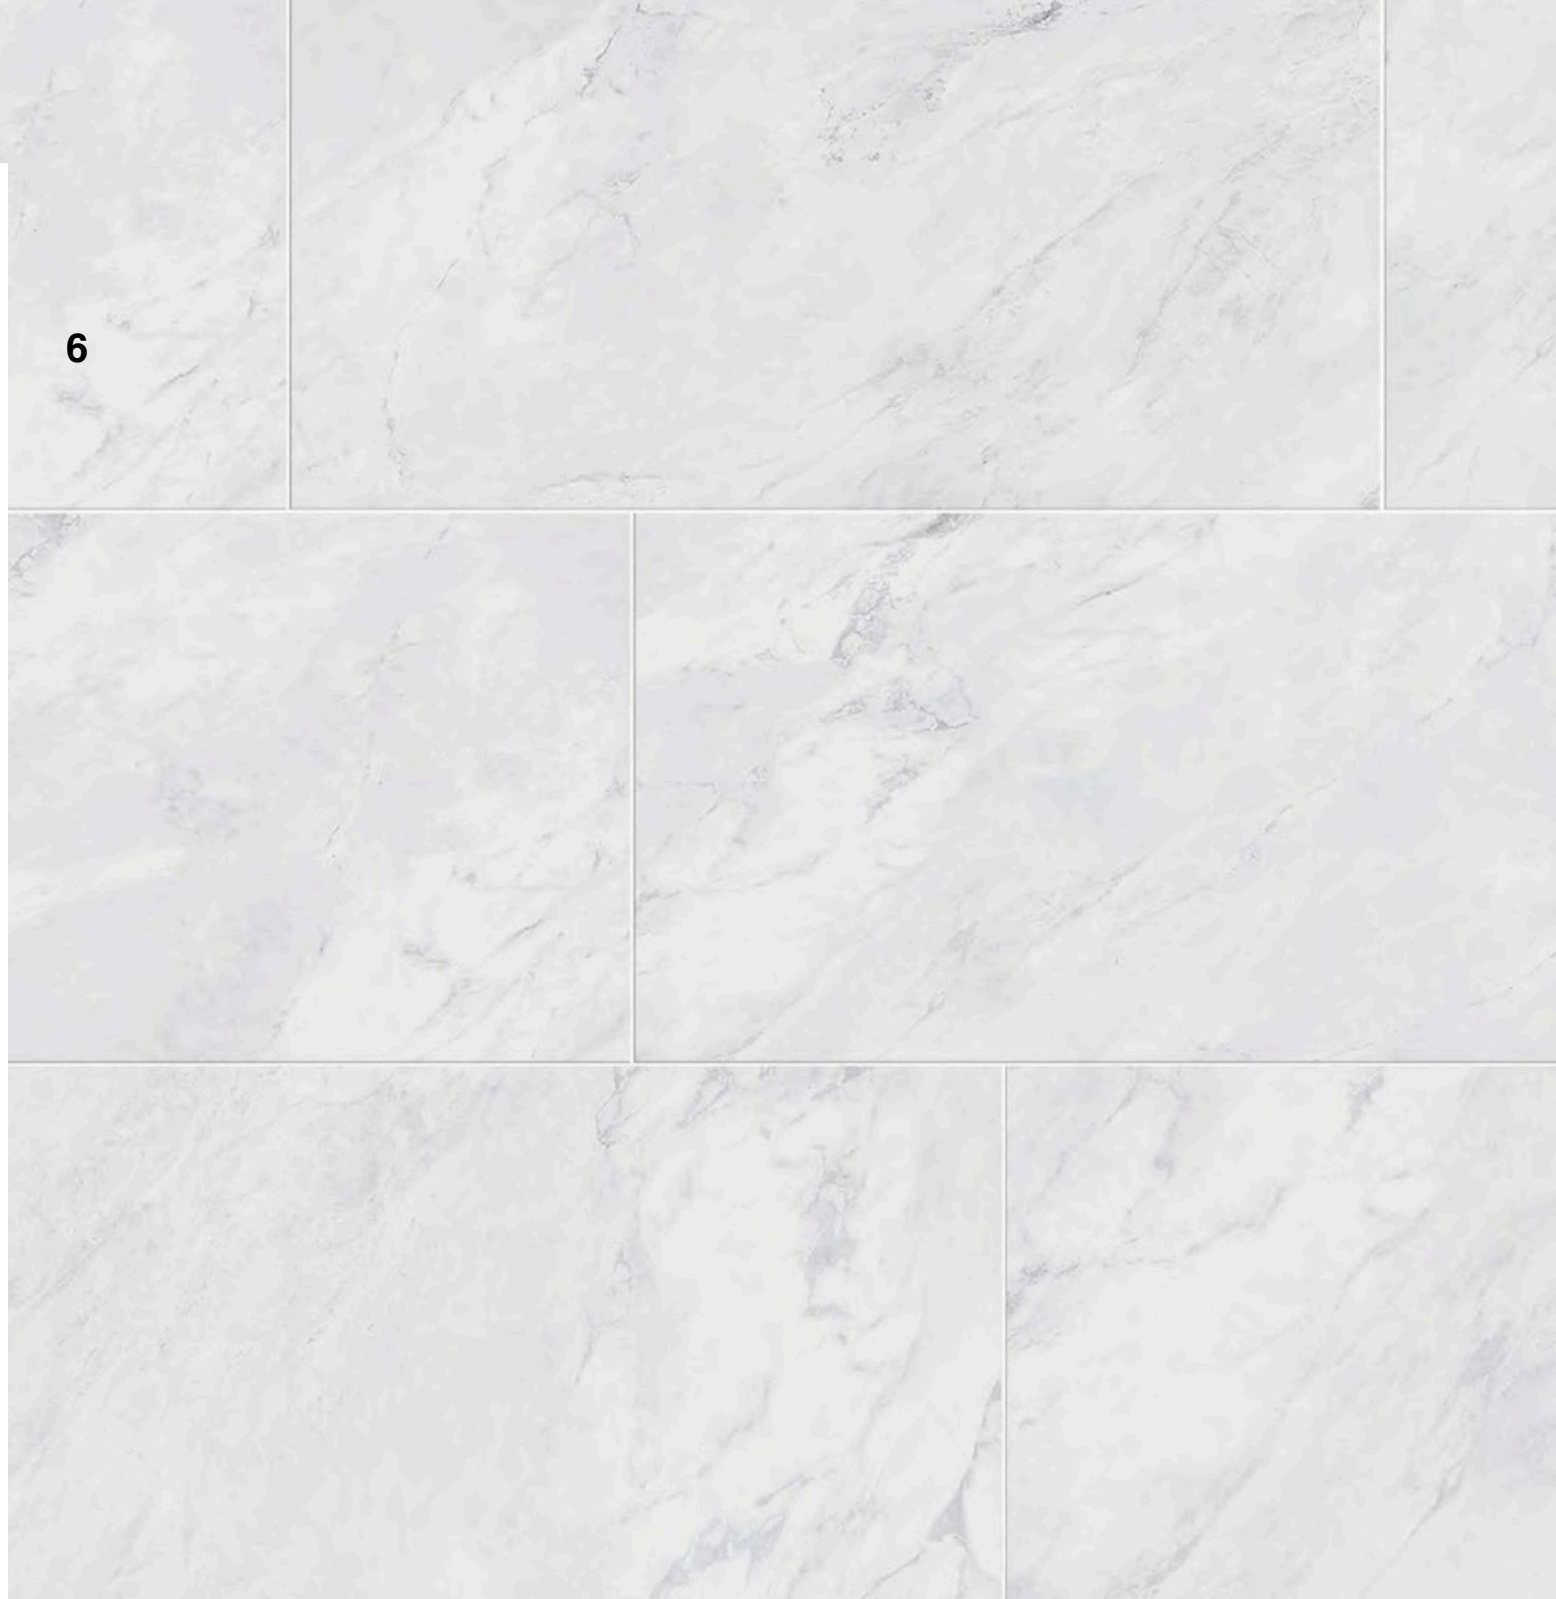

Athenian / ***ALASKA GLACIER***

Athenian





10






Athenian / ***RENOIR***

14

12"x24" / *RENOIR*



16

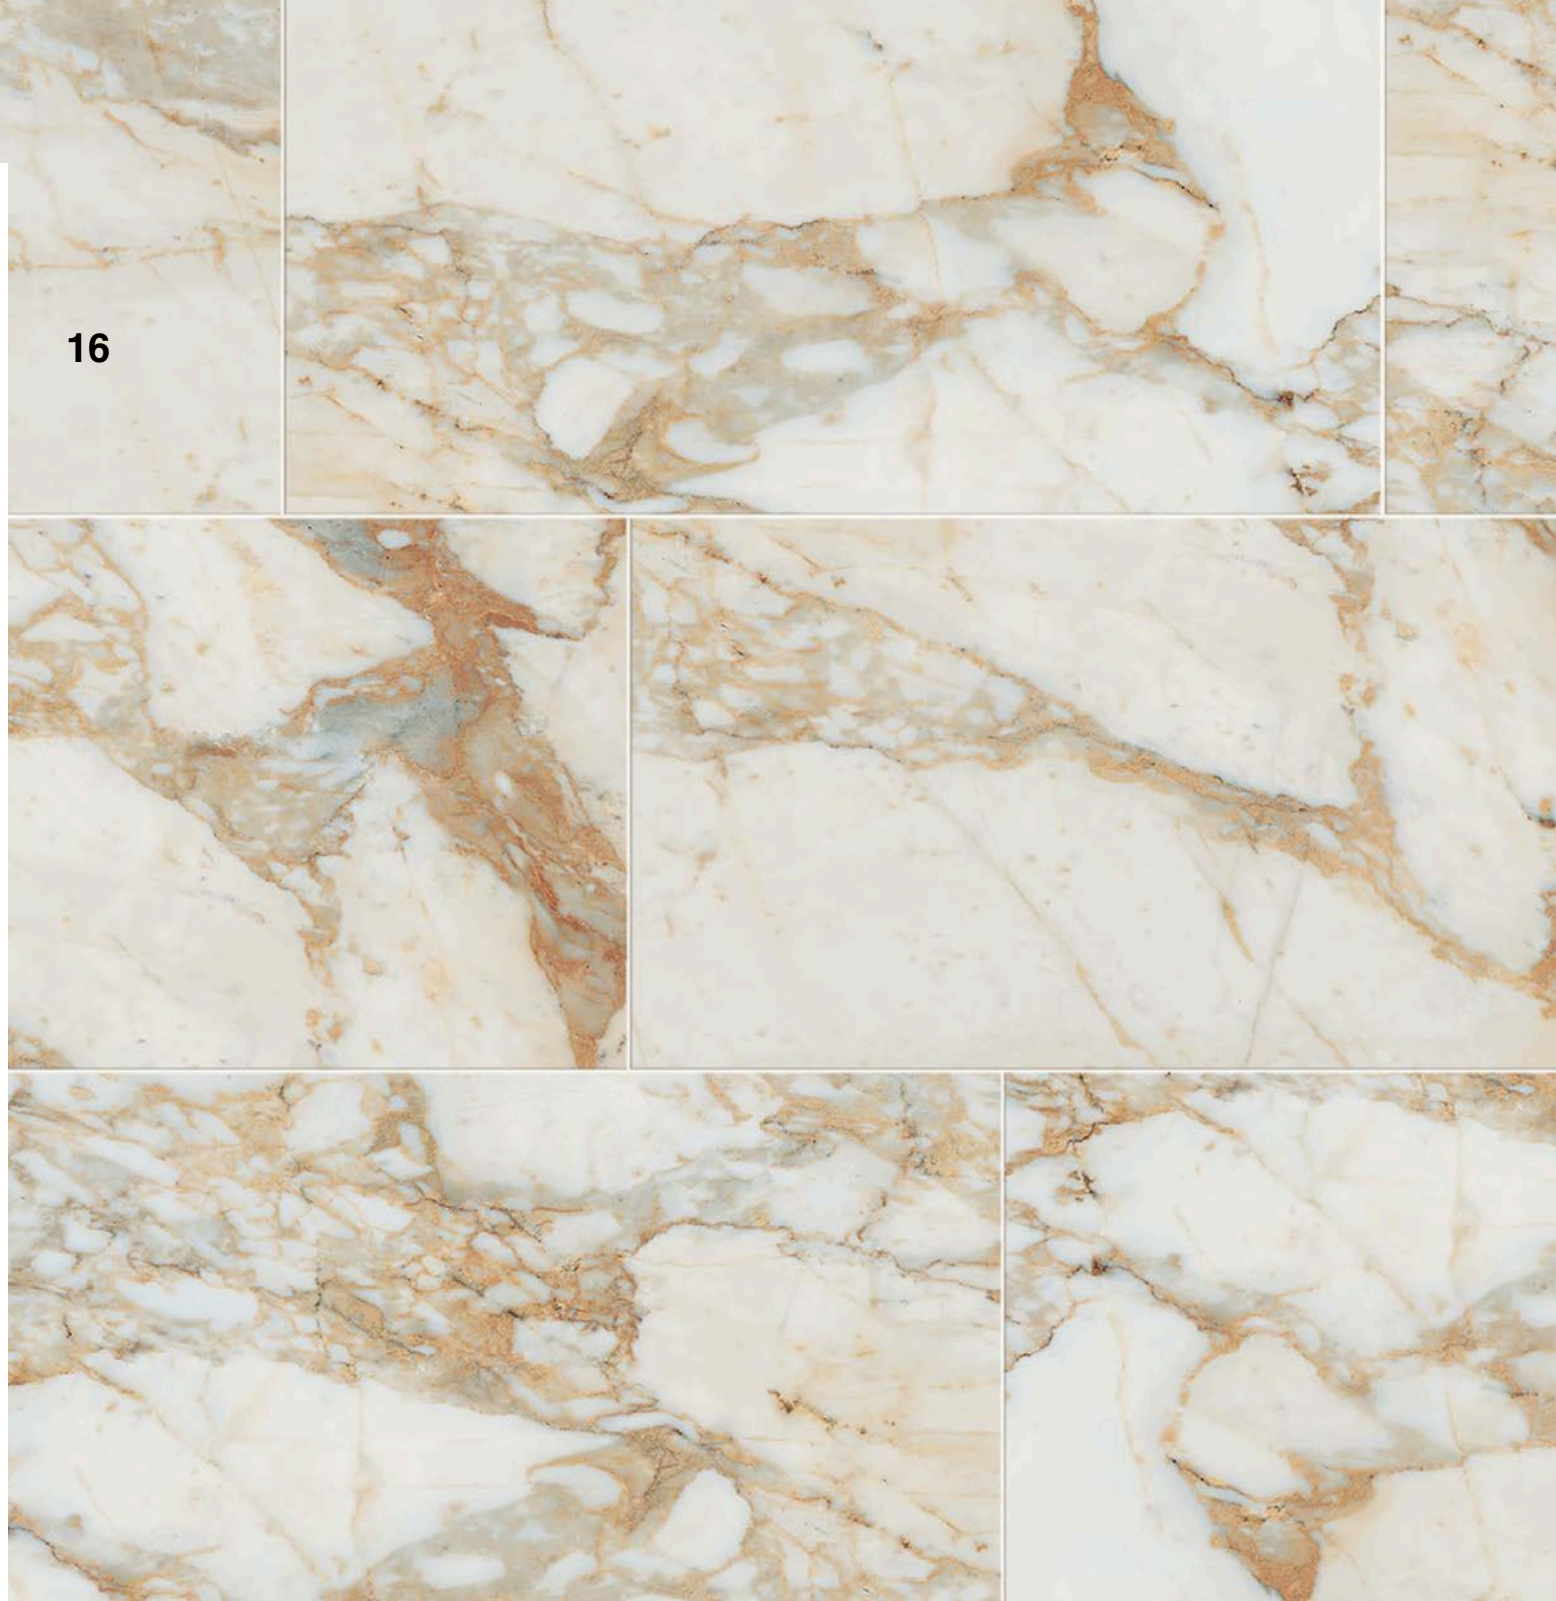



17

Athenian / *CALACATTA GOLD*

Athenian





20



12"x24" / **CALACATTA GOLD**



SIZES & SHADE VARIATION

22

sizes:

12"x24"

Pressed/Matte



1101490 Alaska Glacier

1101491 Renoir

1101492 Calacatta Gold

mosaics & trim pieces:

12"x12"

Mosaic matte 2"x2"




- 1101502 Alaska Glacier
- 1101503 Renoir
- 1101504 Calacatta Gold

3"x24" Bullnose matte




- 1101499 Alaska Glacier
- 1101500 Renoir
- 1101501 Calacatta Gold



V1

UNIFORM
APPEARANCE
Differences among pieces
from the same production run
are minimal.



V2

SLIGHT VARIATION
Clearly distinguishable
differences in texture
and/or pattern with
similar colors.



V3

MODERATE VARIATION
While the colors present on
a single piece of tile will be
indicative of the colors to be
expected on the other tiles,
the amount of colors on each
piece will vary significantly.




V4

SUBSTANTIAL VARIATION
Random color differences from
tile to tile, so that one tile may
have totally different colors from
that on other tiles. Thus, the final
installation will be unique.

Technical Specifications

This product meets or exceeds all standards described in ANSI A137.1 & A137.3.
Este producto cumple o excede todos los estandares de ANSI A137.1 & A137.3.

	SPECS	TEST METHOD	INDUSTRY STANDARD	MILE®stone VALUES	
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.5%	
	SURFACE WEAR RESISTANCE	ANSI A137.1	Surface Wear-resistance properties of glazed vitreous and porcelain tiles.	ALL RESIDENTIAL / COMMERCIAL	
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. Sample must show no visible defects.	NOT AFFECTED	
	D.C.O.F. AcuTest®	ANSI A326.3	INDOOR ≥0.42 WET	≥0.42 WET	
			OUTDOOR >0.55 WET	>0.55 WET 2CM & GRIP	
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED	
	BREAKING STRENGTH GAUGED PORCELAIN	ASTM C1505	≥175 lbf	≥200 lbf	
	BREAKING STRENGTH	ASTM C648	≥275 lbf	≥300 lbf	
	BREAKING STRENGTH OUTDOOR 2CM	ASTM 1505	2000 lbf (10.9 kN)	≥2500 lbf	
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT	
	WARPAGE EDGE	ASTM C485	±0.40% or ±0.05 in (±1.8 mm)	± 0.40%	Rectified
	WARPAGE DIAGONAL	ASTM C485	±0.40% or ±0.07 in (±1.8 mm)	± 0.40%	Rectified
	WEDGING	ASTM C502	±0.25% or ±0.03 in (±0.8 mm)	± 0.25%	Rectified
	WARPAGE EDGE	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WARPAGE DIAGONAL	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WEDGING	ASTM C502	±0.50% or ±0.08 in (±2.0 mm)	± 0.50%	Calibrated
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in	

- Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and **between product runs**.



35-02 Northern Boulevard, Long Island City, N.Y. 11101

www.hometilecenterofny.com

(718) 361-9401