


Amorgos



Amorgos

Contents

Colors / Sizes / Mosaics	pg. 2
Visualizations	pg. 5
Specifications	pg. 18
Accreditations	pg. 20

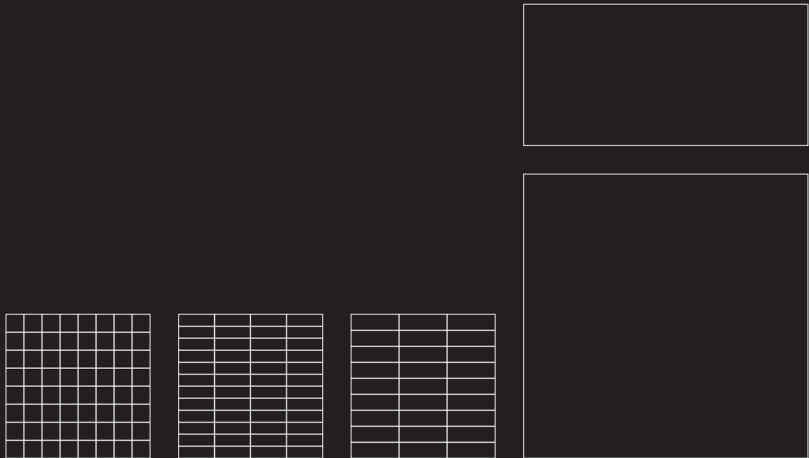


COLOR



SIZES




24"x24"
1104003




12"x24"
1104009


MOSAICS



11.77"x11.77"
(1"x4") Mosaic
1104018



11.7"x11.7"
(1"x3") Mosaic
1104015




11.65"x11.65"
(64 DOT) Mosaic
1104012

WHITE SAND


COLOR



SIZES




24"x24"
1104004




12"x24"
1104010


MOSAICS



11.77"x11.77"
(1"x4") Mosaic
1104019



11.7"x11.7"
(1"x3") Mosaic
1104016



11.65"x11.65"
(64 DOT) Mosaic
1104013


SUNSET

Colors shown may vary from actual product.
Final selection should be made from actual product samples.

COLOR



SIZES




24"x24"
1104005




12"x24"
1104011


MOSAICS



11.77"x11.77"
(1"x4") Mosaic
1104020



11.7"x11.7"
(1"x3") Mosaic
1104017



11.65"x11.65"
(64 DOT) Mosaic
1104014

NIGHT SKY



Amorgos_12"x24"_Night Sky_Matte





Wall: Amorgos_11.77"x11.77" (1x4) Mosaic_12"x24" _Sunset_Matte

Floor: Amorgos_24"x24" _Sunset_Matte



Wall: Amorgos_11.7"x11.7" (1x3) Mosaic_White
Sand_Matte Floor: Amorgos_24"x24" _White Sand_Matte



Wall: Amorgos_11.7"x11.7" (1x3) Mosaic_White
Sand_Matte Floor: Amorgos_24"x24" _White Sand_Matte





Wall: Amorgos_11.77"x11.77" (1x4) Mosaic_Sunset_Matte
Floor: Amorgos_24"x24" _Sunset_Matte



Wall: Amorgos_11.77"x11.77" (1x4) Mosaic_Sunset_Matte
Floor: Amorgos_24"x24" _Sunset_Matte



Wall / Backsplash: Amorgos_11.65"x11.65" (64 DOT) Mosaic_Night Sky_Matte

Floor: Amorgos_24"x24"_Night Sky_Matte

Technical Specifications

This product meets or exceeds all standards described in ANSI A137.1 & A137.3.
Este product cumple o exceed todos los estandares de ANSI A137.1 & A137.3.

	SPECS	TEST METHOD	INDUSTRY STANDARD	ACTUAL VALUES	
	WATER ABSORPTION	ASTM C373	≤0.5 %	≤0.5 %	
	SURFACE WEAR RESISTANCE	ANSI A137.1	Surface Wear-resistance properties of glazed vitreous and porcelain tiles.	ALL RESIDENTIAL / COMMERCIAL	
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. Sample must show no visible defects.	NOT AFFECTED	
	D.C.O.F. AcuTest®	ANSI A326.3	INDOOR ≥0.42 WET	≥0.42 WET	
			OUTDOOR >0.55 WET	>0.55 WET 2CM & GRIP	
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED	
	BREAKING STRENGTH GAUGED PORCELAIN	ASTM C1505	≥175 lbf	≥200 lbf	
	BREAKING STRENGTH	ASTM C648	≥275 lbf	≥300 lbf	
	BREAKING STRENGTH OUTDOOR 2CM	ASTM 1505	2000 lbf (10.9 kN)	≥2500 lbf	
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT	
	WARPAGE EDGE	ASTM C485	±0.40 % or ±0.05 in (±1.8 mm)	± 0.40 %	Rectified
	WARPAGE DIAGONAL	ASTM C485	±0.40 % or ±0.07 in (±1.8 mm)	± 0.40 %	Rectified
	WEDGING	ASTM C502	±0.25 % or ±0.03 in (±0.8 mm)	± 0.25 %	Rectified
	WARPAGE EDGE	ASTM C485	±0.50 % or ±0.07 in (±1.8 mm)	± 0.50 %	Calibrated
	WARPAGE DIAGONAL	ASTM C485	±0.50 % or ±0.07 in (±1.8 mm)	± 0.50 %	Calibrated
	WEDGING	ASTM C502	±0.50 % or ±0.08 in (±2.0 mm)	± 0.50 %	Calibrated
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in	

• Due to the inherent nature of fired porcelain tile, it is important to note that the coefficent of friction may vary within and between product runs.

MADE IN THE USA



35-02 Northern Boulevard, Long Island City, N.Y. 11101
www.hometilecenterofny.com
(718) 361-9401

